

# MYERS-SETH PUMP, INC.™

## CONTRACTOR RANGE

• MULTIPLE PUMP APPLICATION, WILL HANDLE RAW SEWAGE, WELLPOINTING, SOCKDRAIN, DEWATERING, TANK CLEANING, TRANSFER OF INDUSTRIAL WASTEFLOWS

• AUTOMATIC PRIMING & RE-PRIMING

• LARGE SOLID HANDLING CAPABILITY

• PUMP CAST IRON CONSTRUCTION

• ANTI-CAVATIONAL IMPELLER

• POWDER COATED FRAME


• LOW MAINTENANCE

• HIGH RELIABILITY

• LARGE FUEL TANK

• DRY RUNNING

• DRY PRIMING

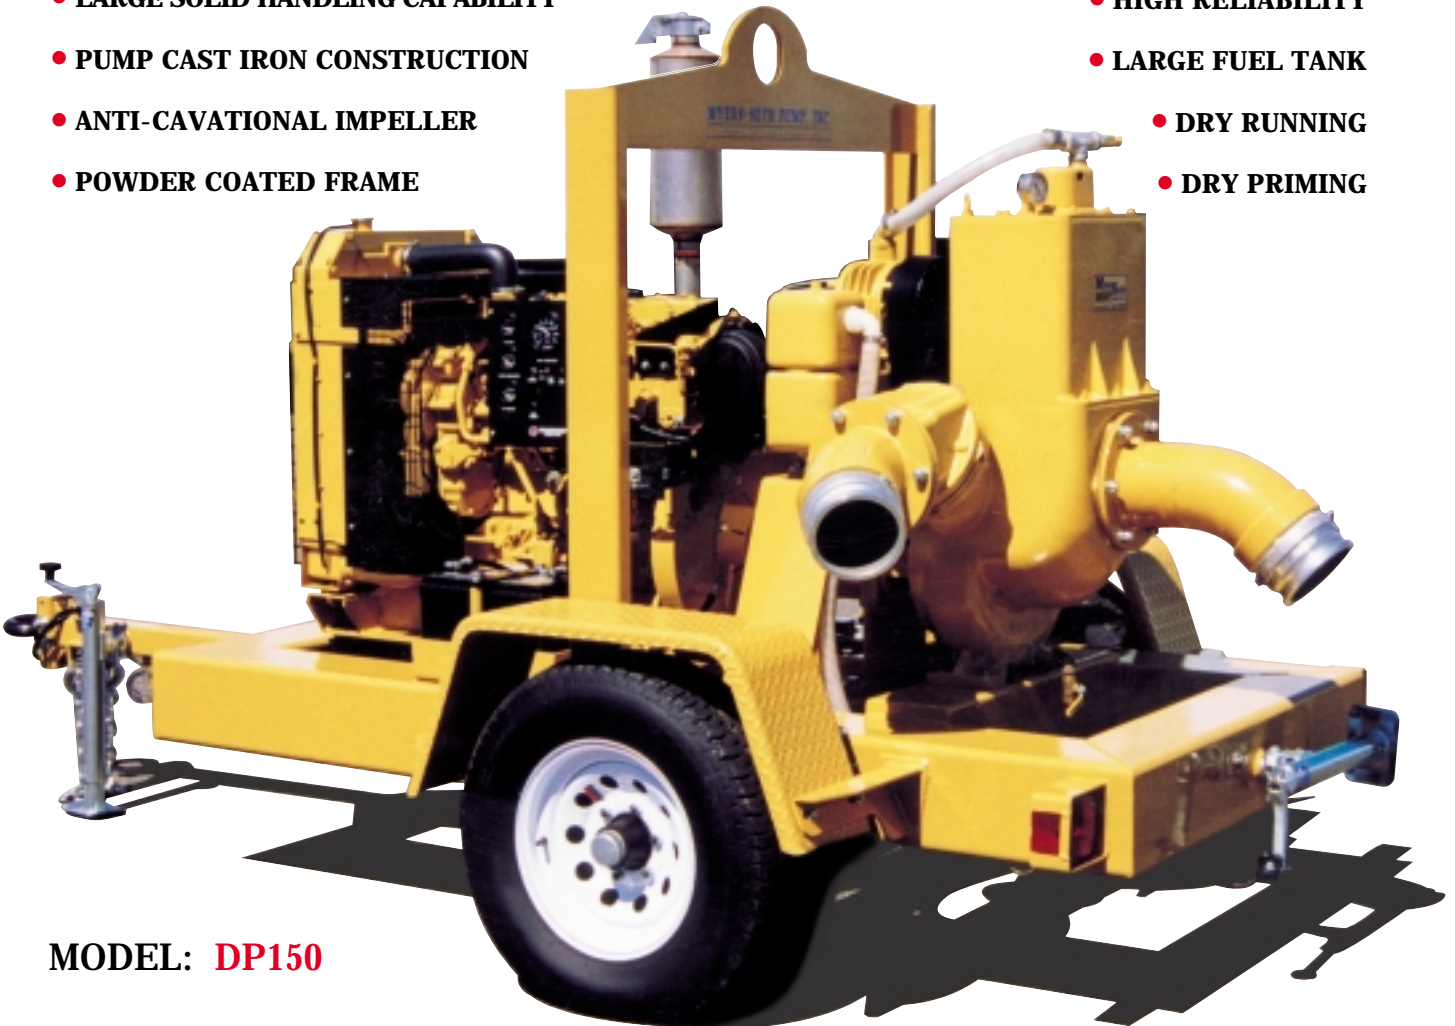

MODEL: **DP150**


### 6" VACUUM ASSISTED TRASH PUMP

The DP150 Pump is specially designed for low maintenance, high reliability and excellent performance. It can withstand the harshest environments, and is capable of handling multiple applications such as trashy water, de-watering, sock drain, wellpointing, sewage applications, tank transfers, and environmental uses. It comes powder coated except on parts where heat and service areas are a factor, to provide outstanding protection in harsh environments. The DP150 is designed as a high performance high volume pump that can accommodate any of your pumping requirements.

**ADVANCE PUMPING TECHNOLOGY**

# Specifications: Vacuum Assisted 6" Centrifugal Trash Pump

**Model:** DP150  
**Pump Mount:** Long Coupled  
**Pump/Engine Operating Speed:** 1,200 to 2,100 Rpm's  
**Priming System:** Vacuum, 50CFM  
**Total Dynamic Head:** 145 Feet / 44.19m  
**Suction Lift Capability:** 30 Feet / 9.14m  
**Pump Flow:** 1,800gph/108,000gph (6,814L)  
**Solid Passage:** 2 1/2", (6.35cm) Semi-Solids  
**Mechanical Seal Faces:** Tungsten Carbide  
**Suction & Discharge Ports:** 6" (150mm)  
**Impeller:** 3 Vane, Anti-Cavation  
**Flapper Type:** Weighted, Reinforced Rubber  
**Axle Capacity:** 6,000 lbs., Torflex  
**Tires & Wheels:** 15" 6 Lug Wheels  
**Trailer Components:** DOT Approved  
**Fuel Tank:** 65 Gallon w/Fuel Gauge  
**Paint System:** Powder coated  
**Construction:** Cast Iron - Class 30  
**OPTIONS:**  
**Engines:** Caterpillar, John Deere, Hatz, Deutz, Perkins (Silent and other engines available)  
**Vacuum Pump:** 100CFM  
**Frame:** Skid Mounted

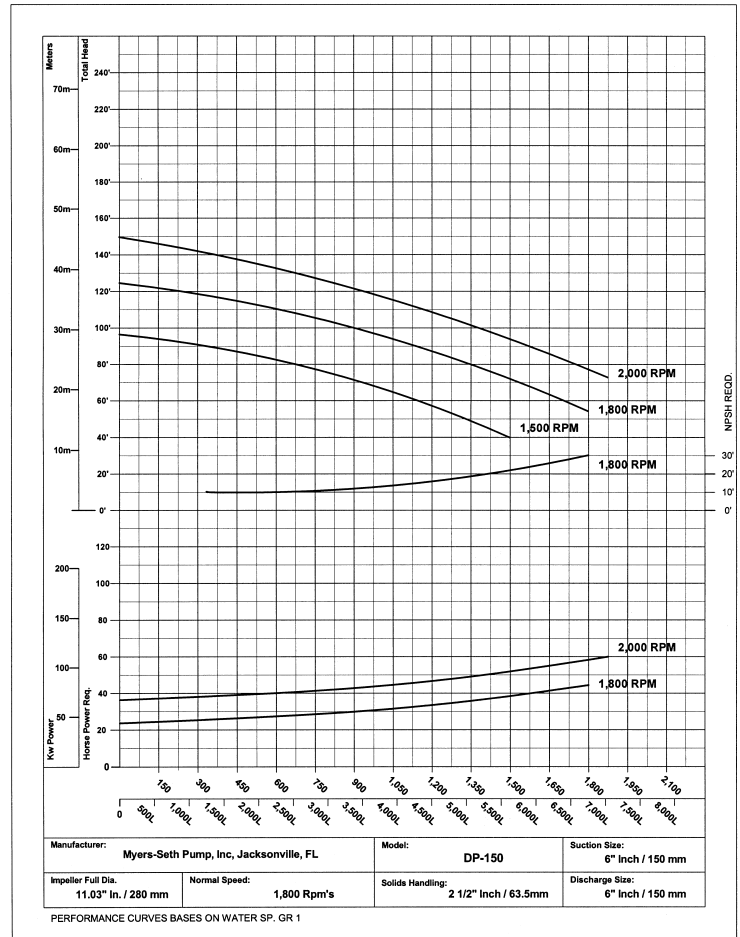

**REPRESENTED BY:**

Specifications Subject To Change Without Notice.

Warranty Statement Available Upon Request.

U.S. Patents Pending


**MYERS-SETH PUMP, INC.**

5800 Beach Boulevard, Suite 203-171 • Jacksonville, Florida 32207 USA

Phone (904) 727-0008 • Fax (904) 399-1076

TOLL FREE 1-888-51-MYERS

# MODEL: DP150

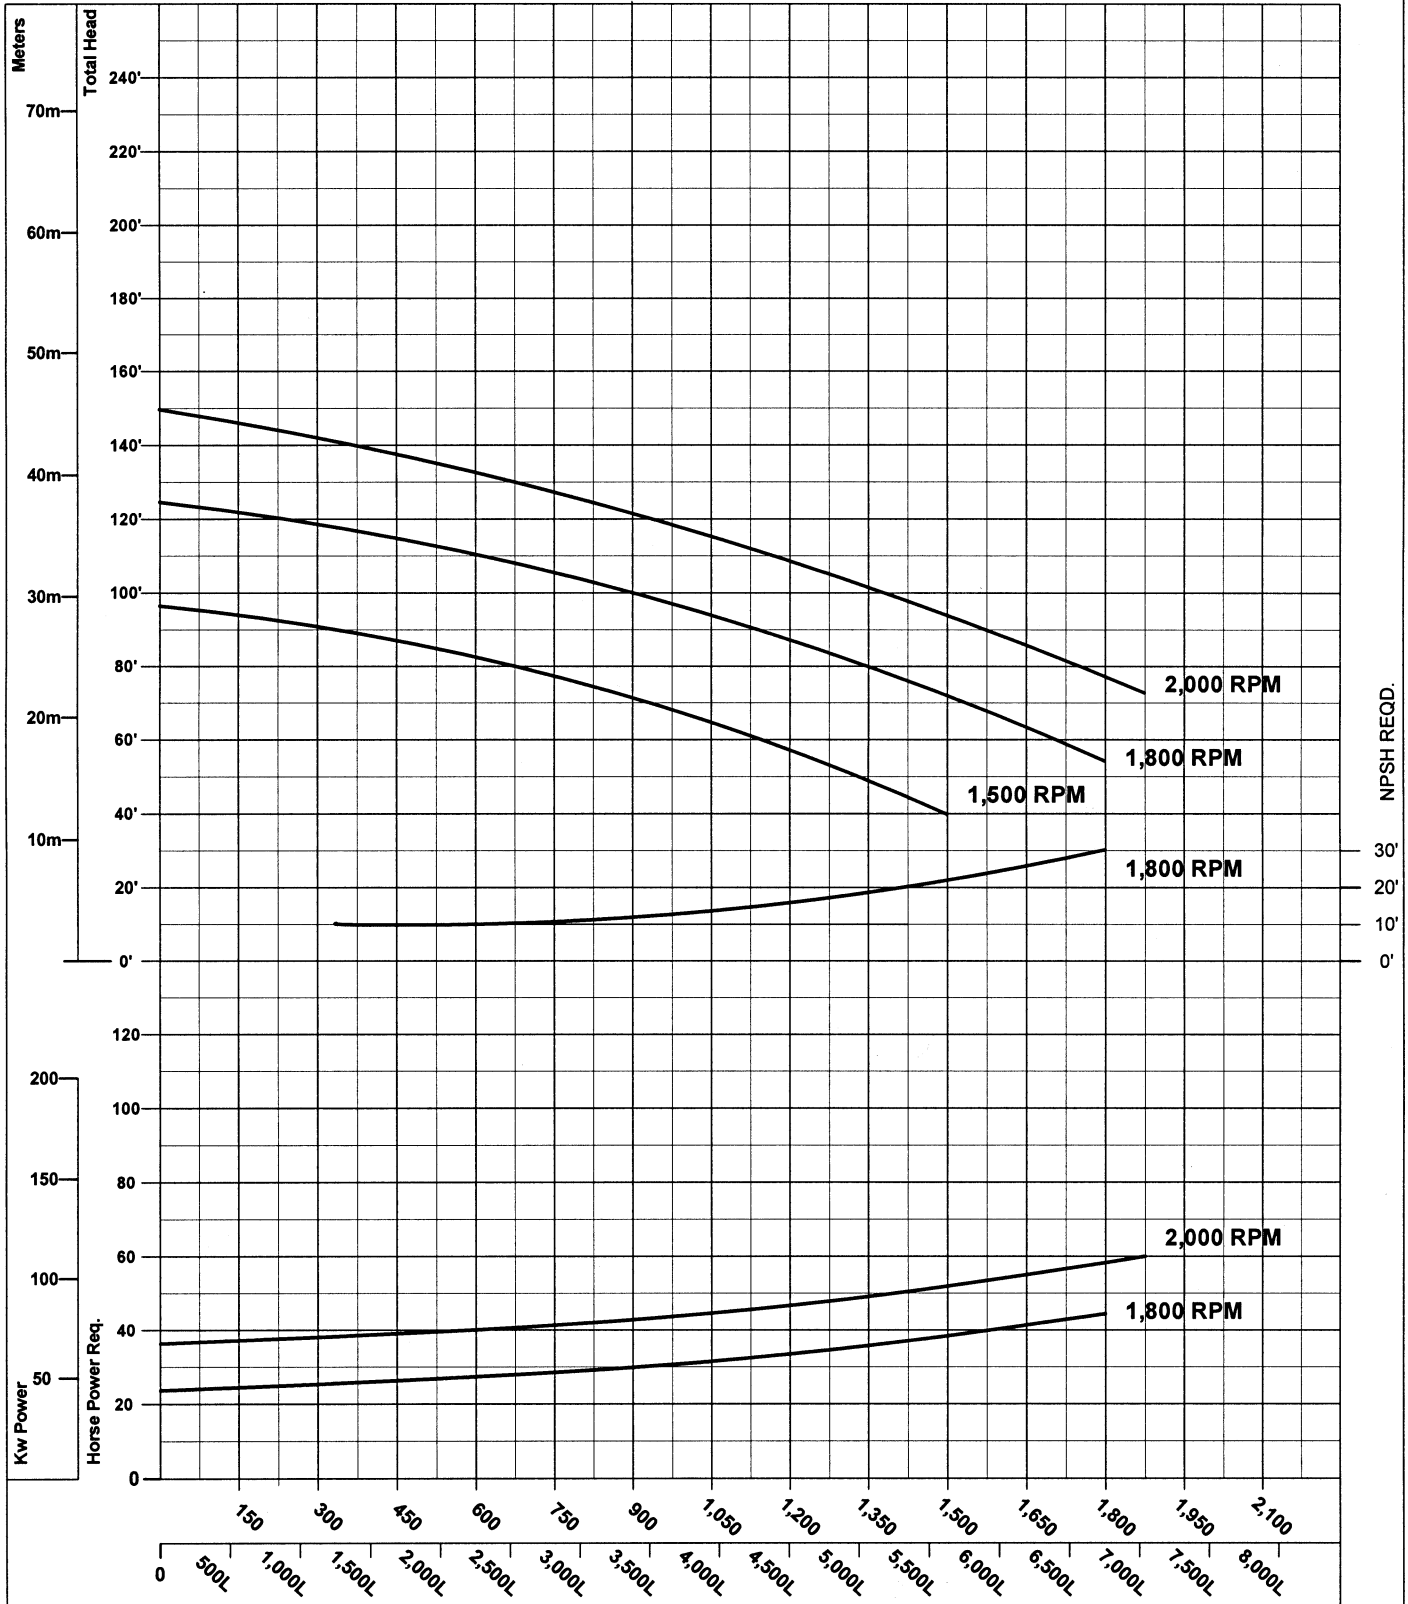

<b>Manufacturer:</b> Myers-Seth Pump, Inc, Jacksonville, FL		<b>Model:</b> DP-150	<b>Suction Size:</b> 6" Inch / 150 mm
<b>Impeller Full Dia.</b> 11.03" In. / 280 mm	<b>Normal Speed:</b> 1,800 Rpm's	<b>Solids Handling:</b> 2 1/2" Inch / 63.5mm	<b>Discharge Size:</b> 6" Inch / 150 mm

PERFORMANCE CURVES BASES ON WATER SP. GR 1