

MYERS-SETH PUMP, INC.™

CONTRACTOR RANGE

- MULTIPLE PUMP APPLICATION, WILL HANDLE RAW SEWAGE, DEWATERING, TANK CLEANING, TRANSFER OF INDUSTRIAL WASTEFLAWS
- LOW MAINTENANCE
- HIGH RELIABILITY
- LARGE FUEL TANK
- LARGE SOLID HANDLING CAPABILITY
- PUMP CAST IRON CONSTRUCTION
- POWDER COATED FRAME



MODEL: **TP150**

6" SELF-PRIMING TRASH PUMP

The TP150 Pump is specially designed for low maintenance, high reliability and excellent performance. It can withstand the harshest environments, and is capable of handling multiple applications such as trashy water, de-watering, sewage applications, tank transfers, and environmental uses. It comes powder coated except on parts where heat and service areas are a factor, to provide outstanding protection in harsh environments. The TP150 is designed as a high performance pump that can accommodate any of your pumping requirements.


ADVANCE PUMPING TECHNOLOGY

Specifications: Self-Priming 6" Centrifugal Trash Pump

Model: TP150
Wheel & Tires: 14 inch/P205/75R14 Tires
Axle Rating: 2,200 lbs. Torflex Axle
Trailer Light: DOT Approved, with 4 Pin Connector
Lifting Bale: Heavy Duty Single Point
Tie Downs: Heavy Duty Chain Tie Downs (4)
Safety Chains: Class II chains (2)
Trailer Hitch: 2" Ball & Pintel Hook combination
Trailer Stand: Adjustable Front & Rear jack stand
 2,000 lbs. (2)

Pump Construction: Volute & Impeller, Class 30, Cast Iron
Pump Impeller: Open Vane, Class 30, 2 Vane Non-clogs
Pump Capacity: 1,200 Gpm @ 5 ft. of suction
Mechanical Seal: Silicon Carbide, Grease Lubricated
Cleanouts: Easy Removable
Wear Plates: Front and Rear, Class 30, Cast Iron
Pump Bearings Lubrication: High Temp Grease
Pump Suction Lift: 28' feet / 8.5 m
Pump Dynamic Head: 65' feet / 19.8 m
Suction & Discharge Connection: 6" inch Female NPT, Single point connection.
 90° Rotatable discharges with 6" Female NPT fittings

Solids Handling: 2-7/8" x 2.0" inch / 72 x 50 mm
Fuel Capacity: 25 gallons / 95 L
Locking Devices: Fuel Cap
Paint System: Powder coated
Height: 65.0 in. / 1651 mm
Width: 67.0 in. / 1701 mm
Length: 99.0 in / 2515 mm
Weight: 1,900 lbs. Approx. / 862 kg.
Options: Road Fenders

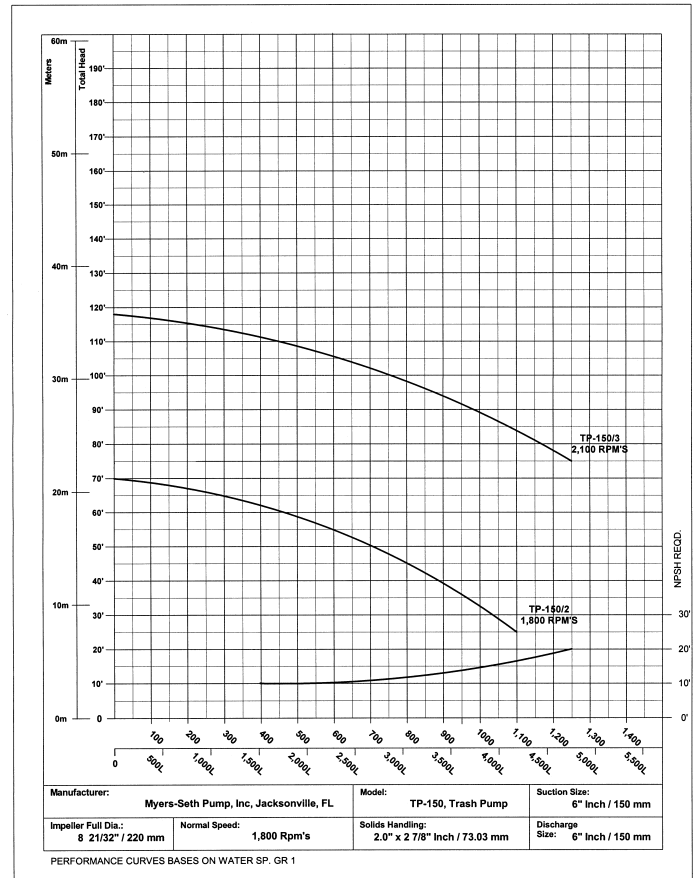

Note: Additional dynamic head flow can be achieved by using a larger horse power engine.

REPRESENTED BY:

Specifications Subject To Change Without Notice.

Warranty Statement Available Upon Request.

U.S. Patents Pending


MYERS-SETH PUMP, INC.

5800 Beach Boulevard, Suite 203-171 • Jacksonville, Florida 32207 USA

Phone (904) 727-0008 • Fax (904) 399-1076

TOLL FREE 1-888-51-MYERS

MODEL: TP150

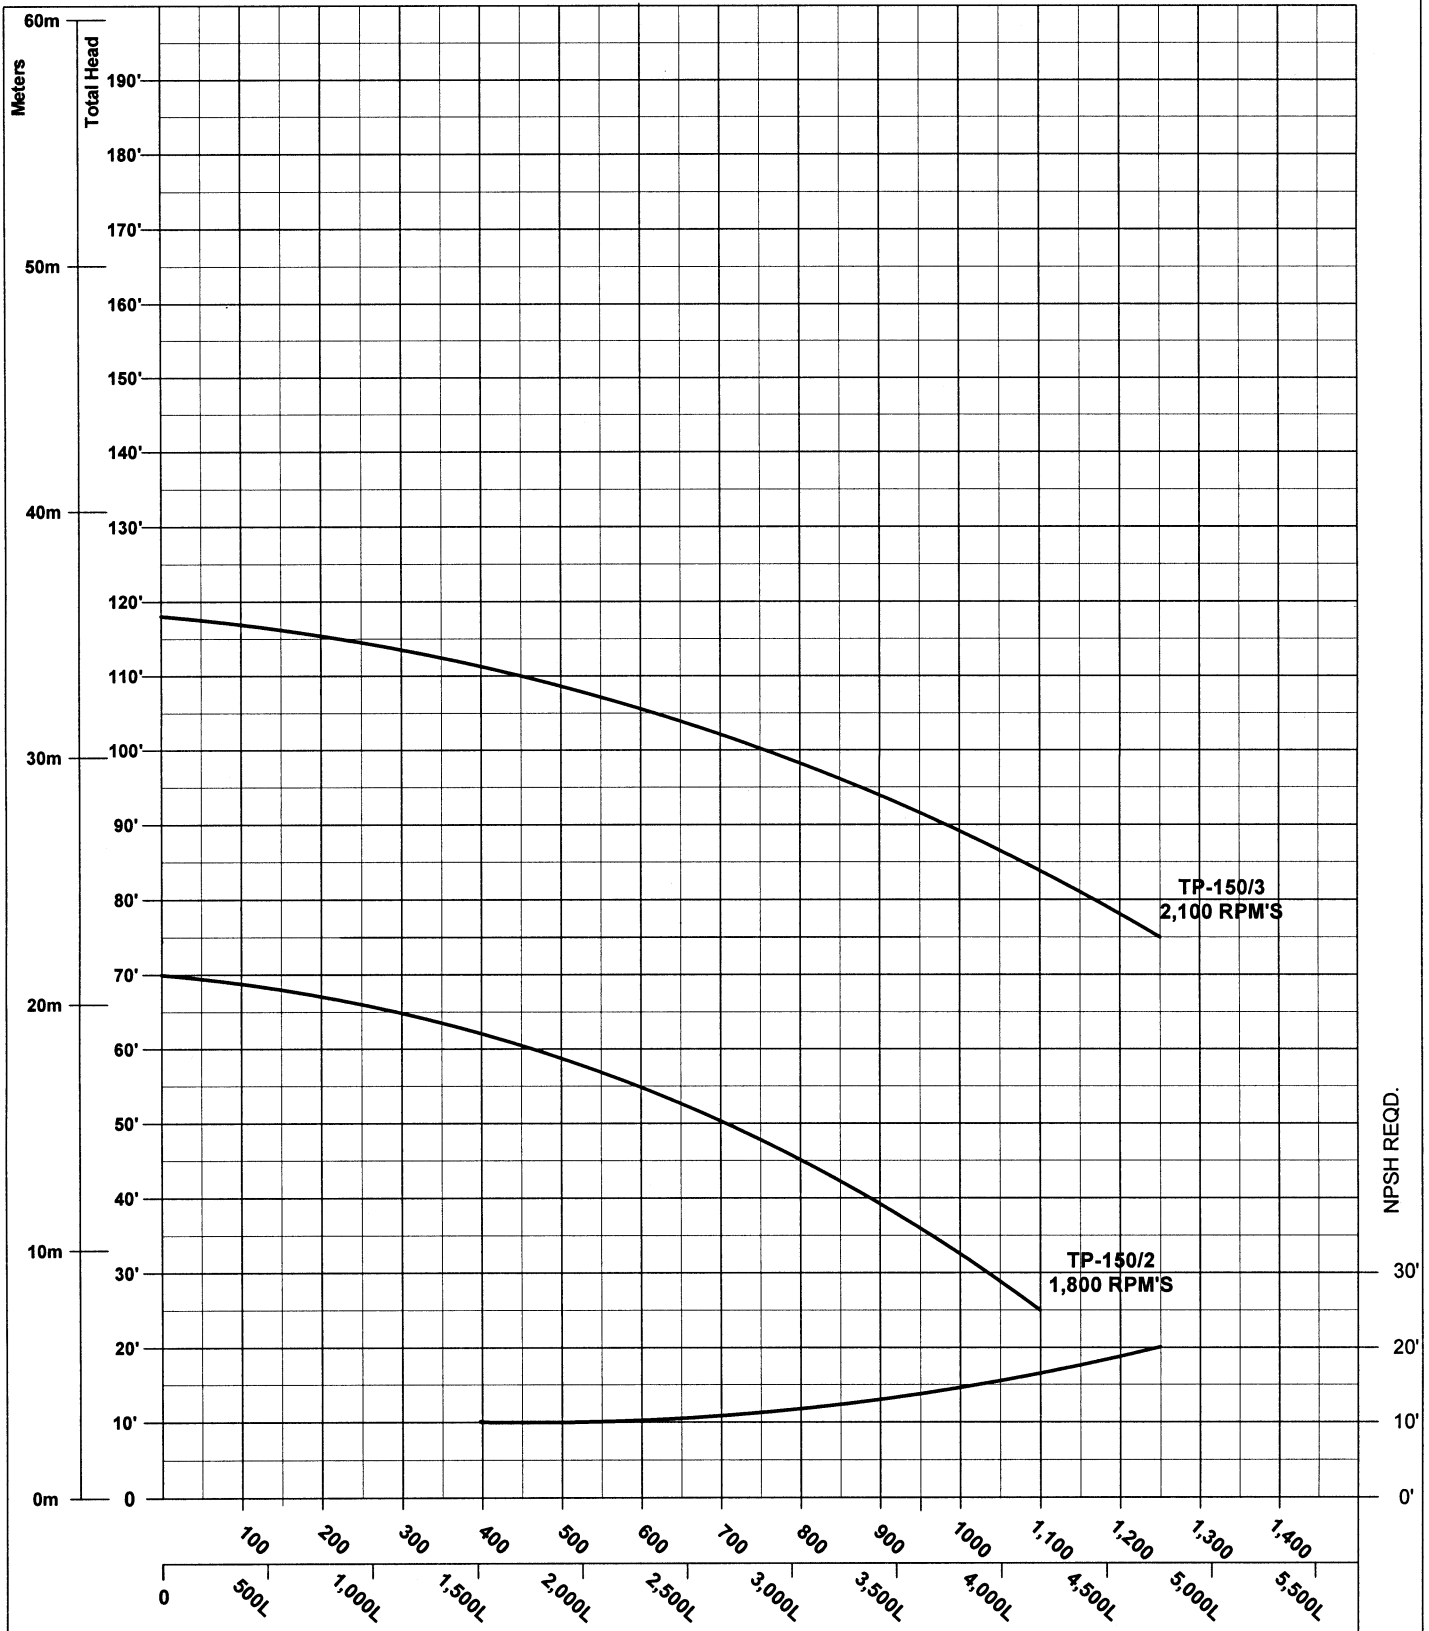

Manufacturer: Myers-Seth Pump, Inc, Jacksonville, FL		Model: TP-150, Trash Pump	Suction Size: 6" Inch / 150 mm
Impeller Full Dia.: 8 21/32" / 220 mm	Normal Speed: 1,800 Rpm's	Solids Handling: 2.0" x 2 7/8" Inch / 73.03 mm	Discharge Size: 6" Inch / 150 mm

PERFORMANCE CURVES BASES ON WATER SP. GR 1